




## DOCK LIGHTS

### Overview of Product

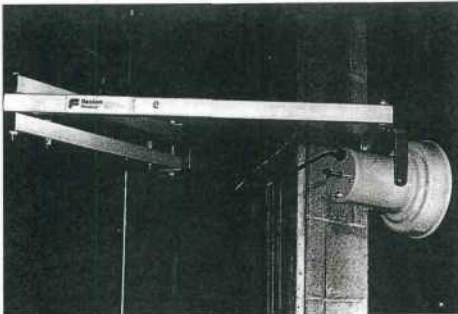

### Styles

**FDL-24**  
arm length 24-inches. Shipping Wt. 16 lbs.

**FDL-40**  
extends 40-inches. Shipping Wt. 18 lbs.

**FDL-60**  
extends 60-inches. Shipping Wt. 23 lbs.

**FDL-90**  
extends 90-inches. Shipping Wt. 35 lbs.



### Standard features

- Twin-strut construction prevents sagging.
- Bronze bearings used at all rotating points.
- Adjustable pivot friction maintains intended position.
- Spring loaded socket assures full lamp support.
- Tension release button for easy lamp changing.
- High-strength bolts used throughout.
- High strength arm stop (not welded bracket) protects cord.
- Baked on Safety-Yellow finish.
- 1 1/2" square, heavy gauge steel arm resists damage from impact.

Uses PAR 38 or R 40 bulb up to 300 watt. (Bulb not included). 3 conductor No. 18 SO cord. Switch included.

### UL LISTED CSA APPROVED

Loading lights shall provide double strut box member on primary support arms. Light head provides full lamp support and contains integral power switch to accept R-40 or Par 38 type bulbs. Controlled pivot friction with bronze joint bushings. U/L 3-wire system.

**WIRE LAMP GUARD available, fits all our Dock Loading Lights No. FDLWG.**

### DISTRIBUTED BY:

Manufacturers of Hi-Performance Doors and Loading Dock Equipment

Toll Free: (800) 365-3667

Outside USA: (412) 749-0400

Fax: (412) 749-0410

Buncher Industrial Park  
Avenue C Building 20-A  
Leetsdale, PA 15056-1376