



POH

Panel Overhead Door

FLEXON Sectional Overhead Door is used for tight spaces where sideroom and headroom are limited to less than half the door size. Suitable for interiors and exteriors of refrigerated buildings.

Design Features

- 1 Year Warranty.
- Special highlift and vertical designs raise the track out of the reach of fork lifts.
- Door tracks are inclined towards the wall for tight sealing and reduced friction.
- Bearings are sealed in grease and require no further lubrication.
- Built in thermal breaks.

Material Specifications

Width:7' 8' 9' 10' 11' 12'

Height:7' 8' 9' 10' 11' 12'

Thickness:1 3/4"

R-Value:14.5

Insulation:Foamed-in-place polyurethane — CFC Free.

Door Panel

Width:21", 24"

Metal:26 gauge G-90 galvanized steel, stucco embossed with shadowlines, both sides.

Paint:Prepainted Imperial White siliconized polyester.

Hardware:Heavy duty hardware and track coated for corrosion resistance, including:


- 2" Tracks
- Adjustable torsion springs operating cable drums for wire rope lifting cables
- Horizontal tracks furnished with spreader bar.
- Continuous built-in reinforcing for hardware attachment.

Gaskets:Jamb and Head weather seal.

End Caps:Galvanized steel.


Operation:Manual

Joint Type:Gasketed tongue and groove design.

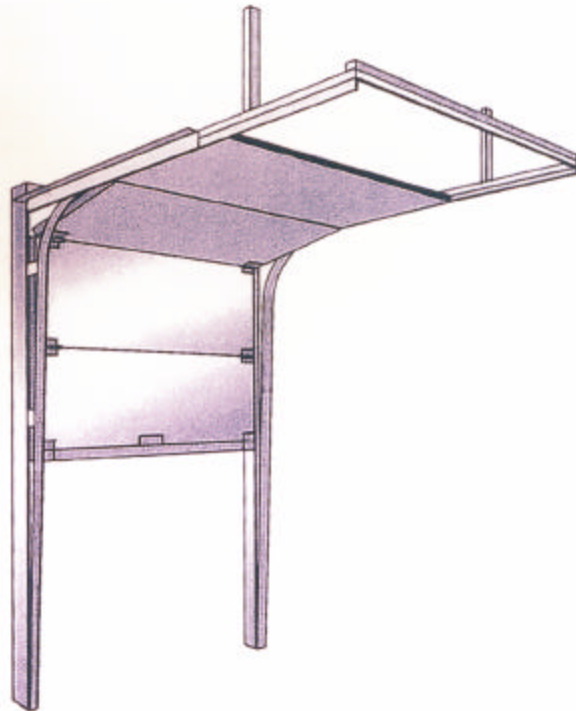

Options

- 24" x 6" acrylic thermopane vision panels
- Locking devices
- High lift design
- Doors over 12' x 12' require chain hoist
- Vertical lift design
- Low head room design
- 50,000 cycle springs
- 100,000 cycle springs
- Electric operator
- 3" track kit

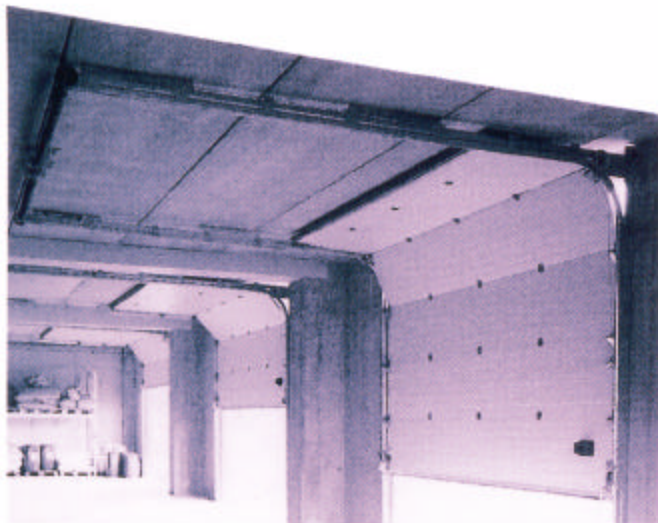

Buncher Industrial Park
Avenue C Building 20-A
Leetsdale, PA 15056-1376
Telephone: (412) 749-0400
Toll Free: (800) 365-3667
FAX: (412) 749-0410
<http://www.flexoninc.com>
e-mail: intl1@flexoninc.com