



## Speed-Guardian™ 4000 U With Versatile Track Applications

A cutting-edge door system that provides maximum insulation, superior safety and ultimate speed.


### Urethane Panel Sections

The 1-5/8" thick door panel made of hot-dipped galvanized steel, provides a durable and lasting surface. A urethane core with an R-value of 12.4 provides optimal insulation, reducing loss of conditioned air and contributing to energy savings. Synthetic panel connectors provide an extremely smooth and quiet door operation, long service life and allow easy replacement of damaged panel sections.



### Safety Light Curtain

The standard light curtain is integral with the guide track making it less susceptible to damage by passing loads. This system enhances protection of personnel and goods and drastically reduces the likelihood of damage and repair to other parts of the door, saving on maintenance costs.

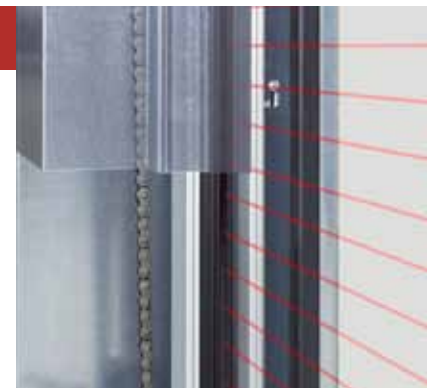

### Surface Finish

Speed-Guardian™ 4000 U doors come with a Micrograin™ exterior surface finish in a White Aluminum color (RAL 9006). This innovative finish features a wave profile embossed into smooth steel, producing attractive light and shadow effects.

