

FLEXON SERIES 400


"90 DEGREE" DOCK SEAL WITH HEAD CURTAIN



"Control Your Environment"



The Flexon Series 400 "90 Degree" Dock Seal is designed to service a wider variety of trailers than a conventional foam compression dock seal. "90 Degree" side pads allow the trailer to pass through and provide full width access to the trailer while providing an efficient seal around the trailer body. This design also reduces pressure on the building wall and gives you versatility by sealing "over The Road" trailers and trucks with step bumpers. Unit Sizes: Door openings up to 9'4" wide backboards are 8" wide with a side pad face of 18", projection 14" and a total unit width of 10'8". For door openings up to 10'0" wide, backboards are 8" wide with a side pad face of 22", projection 16" and a total unit width of 11'4" wide.

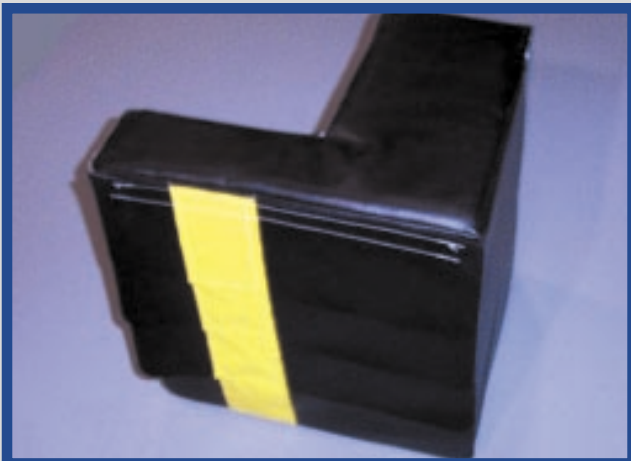

SERIES 400 STANDARD FEATURES

- * Several cover materials for light, medium and heavy-duty applications: 22oz and 40oz vinyls; Bulldog high tear vinyl; 16oz and 40oz Hypalon; also our exclusive Flexilon-S high tear Hypalon.
- * Standard color black.
- * Pressure treated wood backboards.
- * High density foam on base eliminates sagging and allows the unit to maintain its shape year after year.
- * Foam face "90 Degree Pad" is regular density that flexes easily allowing easy penetration and efficient sealing at the sides of the trailers.
- * Foam base and foam face are bonded together with high pressure chemical sealant for a permanent attachment.
- * F-Header curtain at the top for an efficient and adjustable seal.
- * Header curtain is constructed of 40oz fabric and rests on the top of the vertical side pads. Sloped forward for drainage and supported at the front edge with rigid conduit sewn into a pocket to maintain a uniform profile.
- * Wear pleats on front corners of header curtain for durability.
- * High-visibility yellow guide stripes 4" wide x 24" high.
- * Foam filled bottom corner cushions to reduce air infiltration.
- * Galvanized steel mounting hardware.



OPTIONAL FEATURES:

- * Wear pleats for added protection on the face of the side pads and corners of the head pad. Overlapping flaps of material sewn to the base layer of material allowing upward movement on the face of the seal.
Wear Pleats in a variety of materials and exposures.
WP-16 Exposure 16", Overlap 2", Overall 18".
WP-8 Exposure 8", Overlap 10", Overall 18".
WP-4 Exposure 4" Overlap 5", Overall 9".
- * Galvanized steel weather hood.
- * Bottom Pads to seal between the foundation & the trailer bed.

FLEXON, INC. TOLL FREE: 800-365-3667 FAX: 412-749-0410
EMAIL: sales@flexoninc.com WEBSITE: www.flexoninc.com
"CELEBRATING 25 YEARS OF DOOR & DOCK DESIGN EXCELLENCE"