


**flexidoor® Series HDA**  
Touchomatic Traffic Door



The Flexidoor Touchomatic System is unique to automatic doors in that it is an economical method for providing automation to your high traffic areas, yet, does not require any external activation source (i.e. pull cords, push buttons, etc.) during operation. The system is activated when the door panel is pushed open 10° to 15° by the passing load.

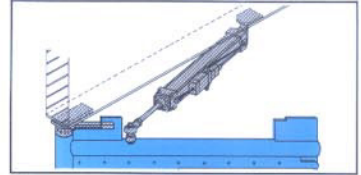


After that point, the pneumatic opener takes over and quickly swings the door to the full open position. 90° swing capability in either direction allows the system to be used in applications where a conventional traffic door may not meet your requirements. Recommended for interior doorways with minimum wind or negative pressure conditions present.

**flexidoor® Series HDA**  
Airomatic Traffic Door



The Flexidoor Airomatic System is a fully automatic door designed to operate off of the compressed air commonly found in most facilities. The pneumatic openers, offering 90° swing capability in one direction, mount above the door lintel and push the panels open when activated. Since there is seldom contact

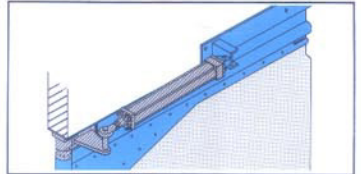

between the door and passing load, replacement of worn panels, collision damage, and maintenance problems are virtually non-existent. This door is extremely well-suited for high-volume traffic areas and is available in standard sizes up to 14'0" w x 20'0" h. For other sizes and additional cylinder mounting configurations, consult factory.