


**FLEXON SERIES 200 "F-HEADER" DOCK SEAL**

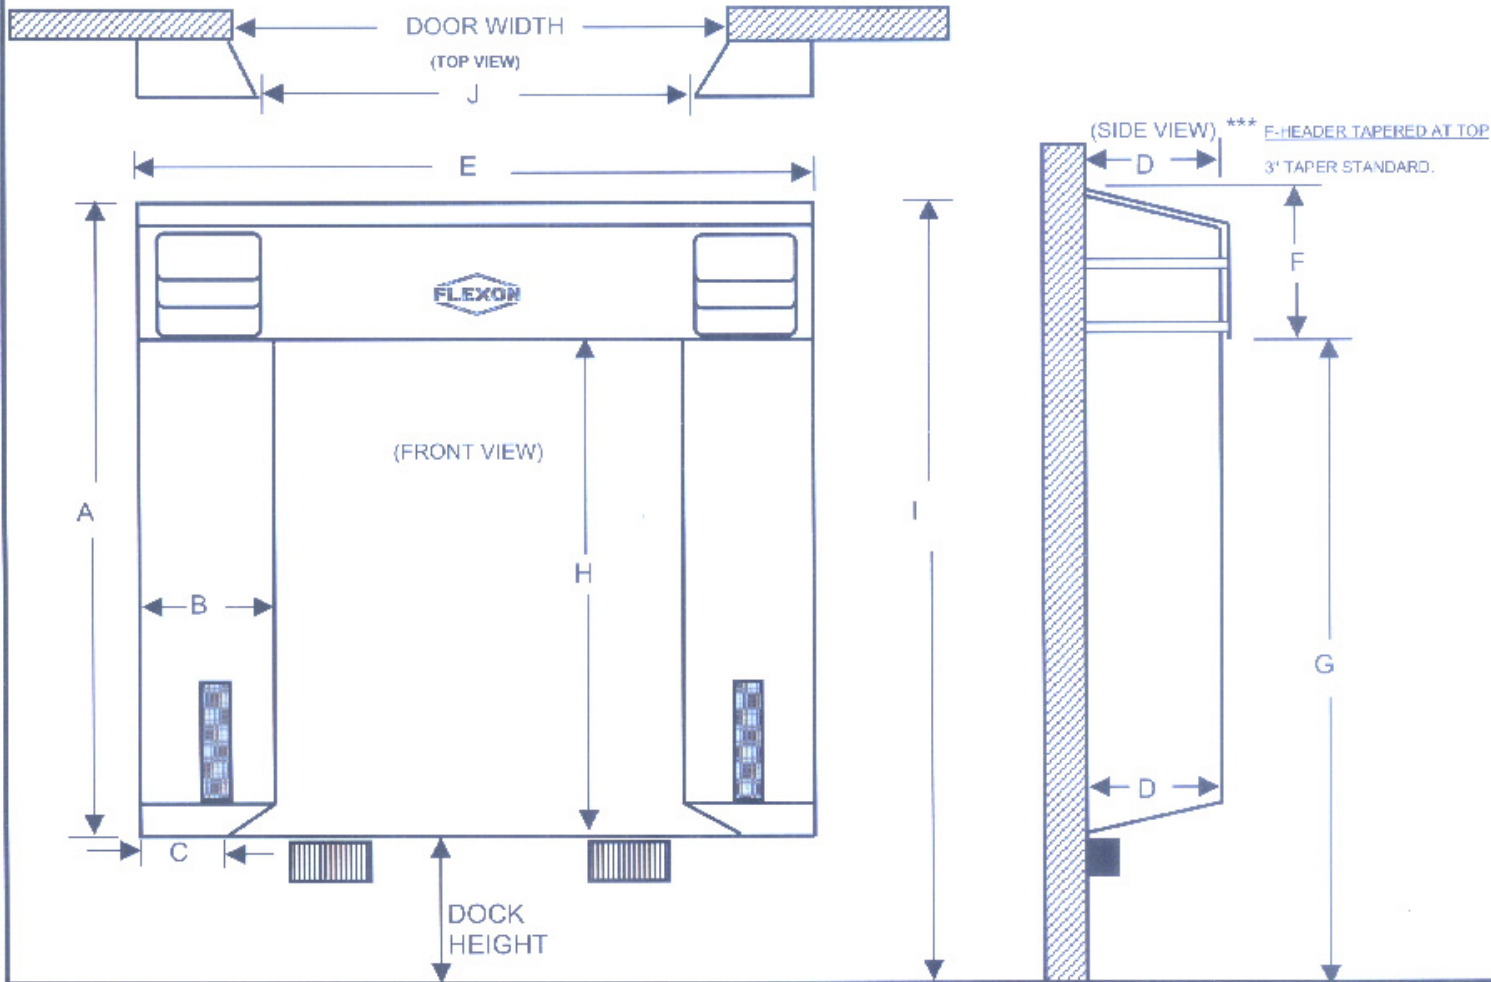

**DOOR & DOCK INFORMATION**

(PLEASE USE INCHES AS UNIT OF MEASURE)

QUANTITY \_\_\_\_\_ DOCK HEIGHT: \_\_\_\_\_  
 DOOR SIZE: \_\_\_\_\_ W X \_\_\_\_\_ H DOCK BUMPER PROJECTION: \_\_\_\_\_  
 DOCK APPROACH: LEVEL: \_\_\_\_\_ DECLINE: \_\_\_\_\_ INCLINE: \_\_\_\_\_  
 SLOPE MEASURED AS RISE OVER RUN IN 50'0" (CHANGE IN SLOPE EXPRESSED IN INCHES OR %) \_\_\_\_\_  
 FOUNDATION WALL: FLUSH: \_\_\_\_\_ PROJECTION: \_\_\_\_\_ RECESSED(TYPICAL OF METAL BLDG.) \_\_\_\_\_  
 TRUCK HEIGHT BEING LOADED: LOWEST: \_\_\_\_\_ HIGHEST: \_\_\_\_\_  
 WALL CONSTRUCTION: CONCRETE: \_\_\_\_\_ BLOCK: \_\_\_\_\_ METAL: \_\_\_\_\_ OTHER: \_\_\_\_\_

**DOCK SEAL INFORMATION:**

QUOTE NUMBER: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_  
 MODEL: \_\_\_\_\_  
 COVER MATERIAL: \_\_\_\_\_

- A. \_\_\_\_\_ SIDE PAD LENGTH.
- B. \_\_\_\_\_ SIDE PAD FACE WIDTH
- C. \_\_\_\_\_ SIDE PAD BACKBOARD WIDTH.
- D. \_\_\_\_\_ PROJECTION: TOP: \_\_\_\_\_ BOTTOM: \_\_\_\_\_
- E. \_\_\_\_\_ F-HEADER CURTAIN WIDTH
- F. \_\_\_\_\_ F-HEADER DROP (UP TO 30" STANDARD).
- \*\*\* SEE NOTE ON STANDARD TAPER ON F-HEADER.
- G. \_\_\_\_\_ F-HEADER DROP OFF GROUND
- H. \_\_\_\_\_ F-HEADER DROP OFF DOCK FLOOR.
- I. \_\_\_\_\_ UNIT HEIGHT OFF GROUND.
- J. \_\_\_\_\_ DISTANCE BETWEEN SIDE PADS AT FACE.

**OPTIONAL FEATURES:**

**102 WEDGE DESIGN:** CHECK YES \_\_\_\_\_  
 NOTE: UNIT MUST PROJECT 8" BEYOND DOCK BUMPERS.  
 FULL HEIGHT GUIDE STRIPE: YES \_\_\_\_\_ NO \_\_\_\_\_  
 WEAR PLEATS: YES \_\_\_\_\_ NO \_\_\_\_\_  
 WEAR PLEAT MATERIAL: \_\_\_\_\_  
 EXPOSURE: \_\_\_\_\_ 4" \_\_\_\_\_ 8" \_\_\_\_\_ 16"

**F-HEADER OPTIONS:**

VELCRO SPLITS: YES \_\_\_\_\_ NO \_\_\_\_\_  
 ROPE PULL-UP: YES \_\_\_\_\_ NO \_\_\_\_\_  
 FOAM IN F-HEADER FACE: YES \_\_\_\_\_ NO \_\_\_\_\_  
 FOAM THICKNESS: 1" \_\_\_\_\_  
 RAIN GUTTER ON F-HEADER EDGE: YES \_\_\_\_\_ NO \_\_\_\_\_  
 METAL HOOD: YES \_\_\_\_\_ UNIT WIDTH: \_\_\_\_\_  
 HOOD PROJECTION: 18" \_\_\_\_\_ 24" \_\_\_\_\_ 30" \_\_\_\_\_ 36" \_\_\_\_\_  
 SPECIAL INSTRUCTIONS: \_\_\_\_\_

