


# FLEXON MODEL 500 SERIES COLLAPSIBLE DOCK SHELTER

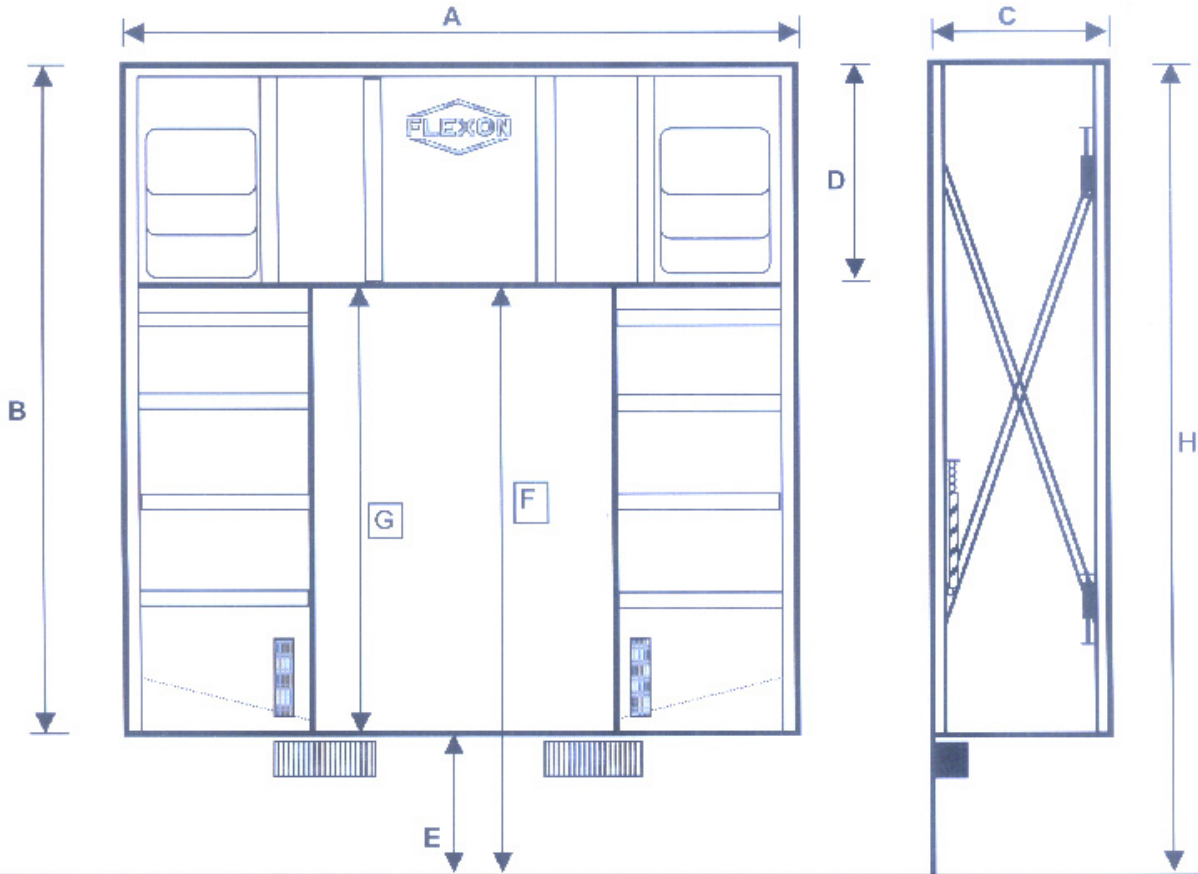

## APPLICATION INFORMATION

(PLEASE USE INCHES AS UNIT MEASURE)

\_\_\_\_\_ QUANTITY  
 \_\_\_\_\_ W X \_\_\_\_\_ H DOOR SIZE  
 \_\_\_\_\_ DOCK HEIGHT.  
 \_\_\_\_\_ DOCK BUMPER PROJECTION  
 DOCK APPROACH: LEVEL \_\_\_\_\_ DECLINE \_\_\_\_\_ INCLINE \_\_\_\_\_  
*SLOPE = RISE/RUN PERCENT CHANGE OVER 50'0"*  
 PERCENTAGE OF SLOPED DOCK APPROACH: \_\_\_\_\_  
 DOCK PROJECTION: FLUSH \_\_\_\_\_ PROJ.: \_\_\_\_\_  
 OTHER SPECIFY \_\_\_\_\_

BUILDING WALL CONSTRUCTION  
 BLOCK: \_\_\_\_\_ METAL: \_\_\_\_\_ CONCRETE: \_\_\_\_\_  
 OTHER SPECIFY: \_\_\_\_\_  
 TRUCK HEIGHT: FROM \_\_\_\_\_ TO \_\_\_\_\_  
 TRUCK REAR BUMPER PROJECTION:  
 FROM: \_\_\_\_\_ TO \_\_\_\_\_  
 TRUCK LIFT GATES: \_\_\_\_\_ YES \_\_\_\_\_ NO.  
 SPECIFY PROJECTION: \_\_\_\_\_  
 CANOPY OVERHEAD: \_\_\_\_\_ YES \_\_\_\_\_ NO

### SHELTER DIMENSIONS

A. \_\_\_\_\_ UNIT WIDTH  
 B. \_\_\_\_\_ UNIT HEIGHT  
 C. \_\_\_\_\_ UNIT PROJECTION  
 D. \_\_\_\_\_ HEAD CURTAIN DROP  
 E. \_\_\_\_\_ DOCK HEIGHT  
 F. \_\_\_\_\_ HEAD CURTAIN OFF GROUND.  
 G. \_\_\_\_\_ HEAD CURTAIN OFF DOCK FLOOR.  
 H. \_\_\_\_\_ UNIT HEIGHT OFF GROUND

### QUOTE NUMBER: \_\_\_\_\_

#### MODEL CURTAIN MATERIAL(CHECK ONE)

\_\_\_\_\_ MODEL 500 V-22 (22oz VINYL).  
 \_\_\_\_\_ MODEL 500 V-40 (40 oz VINYL).  
 \_\_\_\_\_ MODEL 500 BULLDOG (HI-TEAR VINYL).  
 \_\_\_\_\_ MODEL 500 H-40 (40 oz HYPALON).  
 \_\_\_\_\_ MODEL 500 D-10 (.125" THICK FLEXILON)

#### OPTIONS:

METAL HOOD: \_\_\_\_\_ YES \_\_\_\_\_ NO. (HOODS REQUIRED TO PREVENT RAIN & SNOW ACCUMULATION)  
 OVERCOMPRESSION STOPS: YES \_\_\_\_\_ NO \_\_\_\_\_ (SHELTER COLLAPSES TO MINIMUM 8").  
 FOAM BOTTOM CUSHIONS: YES \_\_\_\_\_ NO \_\_\_\_\_

FLEXON, INC  
 SERIES 500 COLLAPSIBLE SHELTER  
 EFFECTIVE 1-05

DISTRIBUTOR: \_\_\_\_\_  
 JOB NAME: \_\_\_\_\_  
 PHONE: \_\_\_\_\_

FLEXON, INC.  
 PHONE: 800-365-3667  
 FAX: 412-749-0410

